

DM 6080 F Conference Unit

- Flush-mounted delegate conference unit
- Channel selector
- Loudspeaker
- Lockable XLR microphone connector



Description

The DM 6080 F is a fully digital flush-mounted conference unit in the DIS DCS 6000 Digital Conference System.

The unit is designed as a discussion unit with channel selector functionality. It features a microphone button, headphone jack, channel selector, a loudspeaker and a lockable XLR microphone connector.

The microphone button enables the user to activate/deactivate the microphone either directly or by a request to speak. A button LED indicates whether the microphone is on (red LED) or in request to speak mode (green LED).

The floor channel is distributed through the built-in loudspeaker, except when the microphone is turned on. The user can also listen to the floor channel by inserting headphones in the headphone jack and adjusting it with the volume buttons. Optionally, the channel selector can be used for listening to an interpretation channel.

The DM 6080 F can be used in combination with the gooseneck microphones GM 652x or GM 6622 or the boundary microphone BM 6620.

The gooseneck microphones GM 652x or GM 6622 can be locked to the unit with a 2 mm hex key. The lock is accessible from the small hole to the right of the XLR socket. Turn the hex key clockwise to enable the lock and insert the gooseneck microphone into the XLR socket. Turn the hex key counter clockwise to disable the lock and remove the gooseneck microphone.

The boundary microphone BM 6620 can be retrofitted by replacing the XLR insert in the plastic adaptor with the boundary microphone. The moxer mini-connector fits with the microphone connector on the PCB.

The DM 6080 F can be combined with any conference units from the DCS 6000 Digital Conference System.

Features

The DM 6080 F has the following standard features:

- Standard conference unit for delegates
- Fully digital audio transmission
- Daisy chain topology with loop-through connections or star topology using junction boxes
- CAT 5e (or higher) F/UTP or U/FTP cabling
- Maximum 3800 conference units per system
- Support for four microphone operation modes; Automatic, FIFO, Manual and VOX (voice activation)
- Support for three microphone interrupt modes enabling 'ping pong' mode
- Auto off of microphones
- Lockable XLR gooseneck microphone connector
- A high-quality loudspeaker
- One channel selector supporting the floor channel and 31 interpretation channels
- One headphone jack
- One microphone button with LED indicators for speak and request to speak

Specifications

Electrical

Frequency response (channel selector)	65 Hz-16 kHz
Frequency range (loudspeaker)	150 Hz-15 kHz
Power consumption	3.5 W
Power maximum (loudspeaker)	3.0 W RMS
THD	< 0.1 %
Signal-to-noise ratio	> 90 dBA
Microphone connection	3-pin female XLR
Headphone connection	3.5 mm jack, female stereo socket

Interconnections

DCS-LAN	Two RJ45 female sockets with auto-termination
----------------	---

Mechanical

Mounting	Flush mounting
Dimensions (H x W x D)	90 x 180 x 62.6 mm
Panel cut-out (H x W)	85 x 157 mm (important: corner radius maximum R3.0)
Weight	650 g
Color	Black
Material	Anodized aluminium
Temperature range	5° to 40° C


Certifications

The DCS 6000 system conforms to standard IEC 60914.

How To Order

Flushmount delegate conference unit. Features channel selector and loudspeaker. **DM 6080 F**

Drawing

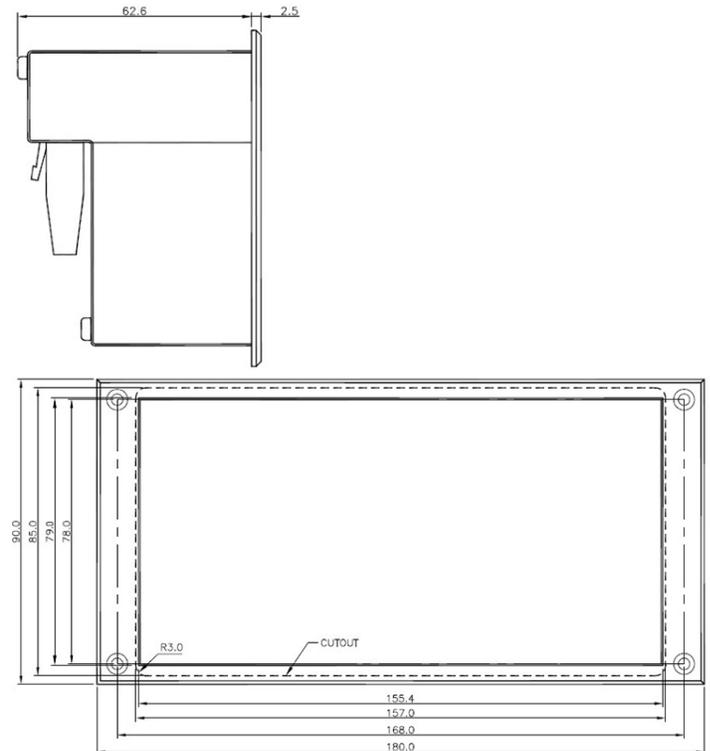

SHURE[®]
LEGENDARY
PERFORMANCE™

United States, Canada,
Latin America, Caribbean:
Shure Incorporated
5800 West Touhy Avenue
Niles, IL 60714-4608 USA

Phone: +1 847-600-2000
Fax: +1 847-600-1212 (USA)
Fax: +1 847-600-6446
Email: info@shure.com
www.shure.com

Europe, Middle East, Africa:
Shure Europe GmbH
Jakob-Dieffenbacher-Str. 12,
75031 Eppingen, Germany

Phone: +49-7262-92490
Fax: +49-7262-9249114
Email: info@shure.de
www.shure.eu

Asia, Pacific:
Shure Asia Limited
22/F, 625 King's Road
North Point, Island East
Hong Kong

Phone: +852-2893-4290
Fax: +852-2893-4055
Email: info@shure.com.hk
www.shureasia.com