

FC 6020 F Front Plate

- Front plate for chairman conference unit
- Flush-mounted installation
- Loudspeaker
- Delegate-off button



Description

The FC 6020 F front plate unit is a flush mounted unit designed to be used in combination with the MU 6040 C microphone unit. The unit is especially suited for installations where the flush mounted unit must take up minimal space with minimum components. The remaining components are fitted into the MU that can be mounted in a more spacious location.

The flush mounted unit features a built-in loudspeaker that distributes the floor channel. The loudspeaker automatically mutes when the microphone is turned on.

The unit also features a microphone and a delegates off button. The microphone button enables the user to activate/deactivate the microphone. The delegates off button enables the user to turn off all active delegate microphones.

The FC 6020 F can be used in combination with the gooseneck microphones GM 652x or the boundary microphone BM 6620.

The gooseneck microphones GM 652x can be locked to the unit with a 2 mm hex key. The lock is accessible from the small hole above the XLR socket. Turn the hex key clockwise to enable the lock and insert the gooseneck microphone into the XLR socket. Turn the hex key counter clockwise to disable the lock and remove the gooseneck microphone.

The boundary microphone BM 6620 can be retrofitted by replacing the XLR insert in the plastic adaptor with the boundary microphone. The moxer mini-connector fits with the microphone connector on the PCB.

The FC 6020 F can be combined with any conference units from the DCS 6000 Digital Conference System.

Features

The FC 6020 F has the following standard features:

- Standard conference unit for chairmen
- Fully digital audio transmission
- Daisy chain topology with loop-through connections or star topology using junction boxes
- CAT 5e (or higher) F/UTP or U/FTP cabling
- Maximum 3800 conference units per system
- Support for four microphone operation modes; Automatic, FIFO, Manual and VOX (voice activation)
- Support for three microphone interrupt ability modes enabling 'ping pong' mode
- Auto off of microphones
- Lockable XLR gooseneck microphone connector
- A high-quality loudspeaker
- Microphone and delegate off buttons with LED indicators
- Single cable connection to the MU 6040 C

Specifications

Electrical

Frequency range (loudspeaker)	150 Hz-15 kHz
Power maximum (loudspeaker)	3.0 W RMS

Interconnections

MU 6040 C	1 m integrated cable
Connector type	HD 15P
Microphone connection	3-pin female XLR

Mechanical

Dimensions (H x W x D)	90 x 160 x 30 mm
Cut out dimensions (H x W)	75 x 140 mm (important: corner radius maximum R3.0)
Weight	200 g
Color	Black
Material	Anodized aluminium
Temperature range	5° to 40° C


Certifications

The DCS 6000 system conforms to standard IEC 60914.

How To Order

Chairman front plate with loudspeaker. Requires MU 6040 C.	FC 6020 F
Chairman mic unit for use with HM 4042 or FD front panel	MU 6040 C

Drawing

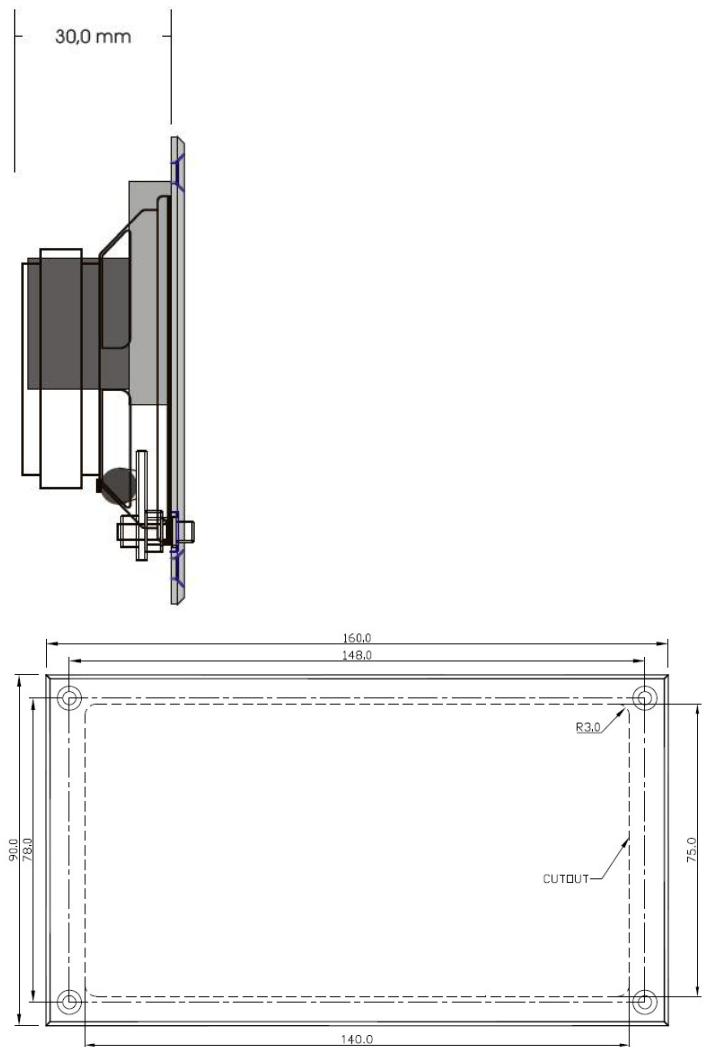

SHURE[®]
LEGENDARY
PERFORMANCE™

United States, Canada,
Latin America, Caribbean:
Shure Incorporated
5800 West Touhy Avenue
Niles, IL 60714-4608 USA

Phone: +1 847-600-2000
Fax: +1 847-600-1212 (USA)
Fax: +1 847-600-6446
Email: info@shure.com
www.shure.com

Europe, Middle East, Africa:
Shure Europe GmbH
Jakob-Dieffenbacher-Str. 12,
75031 Eppingen, Germany

Phone: +49-7262-92490
Fax: +49-7262-9249114
Email: info@shure.de
www.shure.eu

Asia, Pacific:
Shure Asia Limited
22/F, 625 King's Road
North Point, Island East
Hong Kong

Phone: +852-2893-4290
Fax: +852-2893-4055
Email: info@shure.com.hk
www.shureasia.com